

INDUSTRIAL TUMBLER DRYER

TX RANGE **TX9**

9 KG 20LB



FEATURES

- Standard stainless steel drum
- Anthracite grey skin plate
- Inox top panel
- Easy-to-use microprocessor (ECT)
- Axial airflow
- 210° door opening for easy loading and unloading
- Intuitive control with simple selection and 3 programs

OPTIONS

- Stainless steel front
- Reverse drum
- Residual moisture control Sensodry®:
 - safe drying of delicate linen
 - humidity detection in %
- Heating power from 6 (kW) up to 12 (kW), to match various installation requirements
- Coin operated version



23% MORE DRYING EFFICIENT*




20% LOWER ENERGY CONSUMPTION*



30% FASTER EVAPORATION*



TYPE		TX9
CAPACITY		
Drum capacity 1:18	kg/lb	11/24
Drum capacity 1:22	kg/lb	9/20
Drum volume	Ĭ	195
Drum diameter	mm	Ø 670
Drum depth	mm	555
DOOR		
Door opening	mm	Ø 500
Opening direction		Right (reversible)
Door opening angle		210°
DRYING PERFORMANCE		
Airflow type		Axial
Airflow	m3/h	300
HEATING		
Heating type		Electric
Heating power	kW	6 / 9 / 12
Total power supply	kW	6,4 / 9,4 / 12,4
Electrical connection		3x220-230V 50Hz
		3x220-230V 60Hz
		3x240V 50Hz
		3x380-415V+N 50Hz
		3x380-415V+N 60Hz
		3x380-415V 50Hz
		3x380-415V 50Hz 3x440V 60Hz
MOTOR		3X44UV 6UHZ
Fan	kW	0,25
Drive	kW	0,25
CONNECTION		
Exhaust	mm	150
PROGRAMMER		Easy Control
NOISE		
Drying sequence	db	55
DIMENSIONS		
H×W×D	mm	1150x710x945
Net weight	kg	125
TRANSPORT DATA		
Packed H×W×D	mm	1253x752x970
Gross weight	kg	180

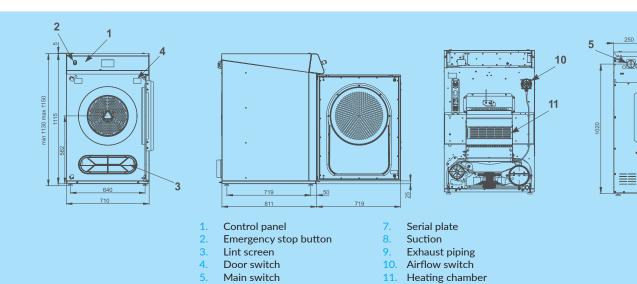



8

Main power supply